

## Filled Connectors For Outdoor/Irrigation Use




### Installation Instructions

**IMPORTANT:** Turn off power before installing or removing connector.

Product to be used in accordance with local and national codes.

1. Strip #22-18 wires 1/2" and #16-12 wires 3/8".
2. Align frayed strands or conductors.
3. Do not pre-twist. Place stripped wires together with ends even, but lead smaller stranded wires slightly ahead of larger solid or stranded wire.
4. Twist connector onto wires pushing firmly until hand-tight. **DO NOT** over torque.
5. Swipe excess sealant in and around conductors. **DO NOT REUSE.**

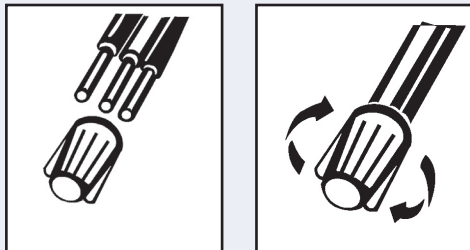

### DryConn® Gray/Gray

Catalog #	Selling Unit
10111	Bag of 20

### PRODUCT SPECIFICATIONS & MEASUREMENTS

Max. Voltage: 300-600V (1,000V in fixtures and signs)

Connector Size: 7/16" - 27/32"

Wire Type: Copper/Copper

Wire Range: Min #22/Max #12

Temperature Rating: 105°C (221°F)


Silicone Sealant: -45°F to 400°F

UL Designation: KO

Measurements (Inches):

A - 0.844 B - 0.250

C - 0.438 D - 0.313

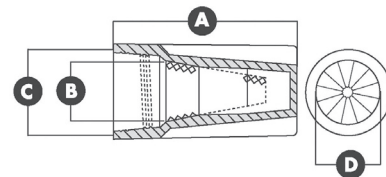

- UL 50 tested for watertight/raintight applications
- UL listed and CSA certified as a Pressure Type Connector

See reverse side for a complete listing of wire combinations.

*Suitable for low voltage applications.*

## Filled Connectors For Outdoor/Irrigation Use

### 300V Wire Combinations

5 #18, 20 or 22	3 #16	1 #12
4 #20 w/1 #22	3 #20 w/1-2 #22	2 #20 w/2-3 #22
1 #20 w/4 #22	4 #18 w/1 #20 or 22	3 #18 w/2 #20 or 22
2 #18 w/3 #22	3 #16 w/1 #18, 20 or 22	2 #16 w/3 #20 or 22
2 #16 w/2 #18	2 #14 w/2 #22	2 #14 w/1 #18 or 20
1 #14 w/3 #18 or 20	1 #14 w/2 #16	

### 600V Wire Combinations

3-4 #20 or 22	2-4 #18	2 #14 or 16
1 #12	2 #20 w/1-2 #22	1 #20 w/2-3 #22
3 #18 w/1-2 #20 or 22	2 #18 w/1-3 #22	2 #18 w/1-2 #20 or 22
1 #18 w/3-4 #22	1 #18 w/1-4 #20	2 #16 w/1-3 #22
2 #16 w/1-2 #20 or 22	2 #16 w/1-2 #18	1 #16 w/1-4 #20 or 22
1 #16 w/1 #18 or 20	2 #14 w/1 #22	1 #14 w/2-4 #22
1 #14 w/1-3 #20	1 #14 w/1-2 #18 or 20	1 #14 w/1 #16 or 18