





Multi-stream technology maximizes the water-efficiency of your irrigation systems







eaturing a unique, multi-trajectory rotating stream delivery system that achieves water-conserving results, the MP Rotator is a revolutionary product, unlike anything else in the field of irrigation.

A multi-stream rotor the size of a spray nozzle, the MP Rotator features only one moving part...technology that assures proven reliability. It fits any conventional spray head body or shrub adapter, transforming one into a high uniformity, low precipitation rate sprinkler that boasts an industry first: true matched precipitation at any arc and any radius.

The MP Rotator is ideal for new systems, with ultimate design flexibility (from 4' strip to 30' radius), as well as lower installation costs and better system efficiency. It's also perfect for revitalizing older systems—a retrofit can solve both low pressure and poor coverage problems. Plus, it's the solution for slopes and tight soils, as the low precipitation rate radically reduces runoff.

To save water, solve problems, and simply do a better job of irrigating, make the switch to the MP Rotator.



MP Corner

## **Revitalize Old Systems**

With so many models to choose from, the MP Rotator has the perfect solution for rejuvenating an older spray system without requiring a new point of connection, new lateral lines, or new valves. Some models even make it possible to eliminate existing heads, saving additional labor and material costs. Even better, independent water audits have shown potential water savings of up to 30% when systems are retrofitted with MP Rotators.



# Features & Benefits



#### Superior Efficiency

Multiple rotating streams provide excellent uniformity

#### Matched Precipitation

Automatic matched precipitation even after arc and radius adjustment

#### Minimal Runoff

Low precipitation rate reduces runoff on slopes and tight soils

#### Rotator® Technology

Proven in demanding agricultural conditions since 1987

#### **Superior Dirt Tolerance**

"Double-pop" flushes on start-up and shut-down

#### Simple and quick adjustments

Easy arc adjustment, easy radius adjustment up to 25%, no nozzle to change

# Setting a New Standard for Water Efficiency in the Turf and Landscape Industry



The MP Rotator's multi-trajectory, revolving streams apply water much more slowly and uniformly than conventional sprays—especially after adjustment has been made to both the radius and the arc. On slopes and clay-like soils, this allows water to soak into the landscape instead of running off and being wasted. In fact, independent audits have shown that water usage can be reduced by up to nearly one-third of current levels when conventional sprays are replaced with MP Rotator sprinklers. Additional watersaving advantages include better windresistance, less misting, and the ability to handle reclaimed water.

# Rotating Multiple Streams: Actually a Powerful Conservation Tool



The MP Rotator's multiple, rotating streams are fascinating to watch. But form follows function in a quality irrigation product, so each MP Rotator stream is designed to complement its partners. The MP Rotator's wind-resistant, multi-trajectory streams apply water much more slowly and uniformly than conventional misters and sprays — especially after adjustments. This prevents unwanted wet spots and ugly brown spots from appearing during the heat of the summer.

# Hunter's Line of "Proven Water Saver" Products: Because Every Drop Counts

As our population grows, but our sources of water do not, there will be less of the wet stuff to go around. Never before has water conservation seemed so important.

To that end, Hunter has assembled a family of products that makes it possible for you to create a more efficient system. In fact, no other manufacturer offers such a wide array of water-saving components that covers all aspects of irrigation. Visit www.HunterIndustries.com to see all our Proven Water Savers.



Until now MP Rotator has been seen on many different spray bodies, but never has a spray body been created just for the MP Rotator. Introducing the MPR 40, a spray body that optimizes the performance of the MP Rotator. It provides the perfect combination of Hunter's famous Pro-Spray™ body with a specially calibrated pressure regulator. This gives the MP Rotator a consistent 40 PSI output, meaning even coverage and optimal performance.

Pressure regulated to 40 PSI for optimum efficiency with the MP Rotator.




The extra tough co-molded wiper seal prevents leaks even at higher pressures.

Two-piece ratchet design makes head adjustment quicker and more precise.

Heavy-duty body and cap construction with multithread buttress design withstands the harshest environments.

# Maintain Matched Precipitation – Any Model, Any Arc, Any Radius

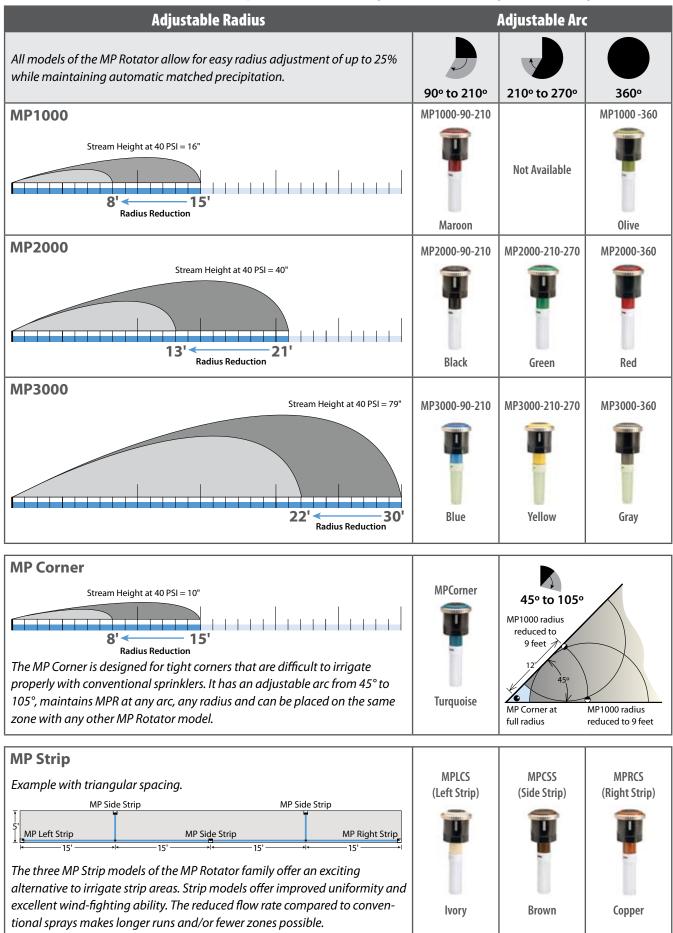

MP Rotator Performance Data																			
		MP1000* Radius: 8' to 15'*** Adjustable Arc and Full Circle Color Code: Maroon or Olive					MP2000* Radius: 13' to 21'*** Adjustable Arc and Full Circle Color Code: Black, Green, or Red					MP3000** Radius: 22' to 30'*** Adjustable Arc and Full Circle Color Code: Blue, Yellow, or Gray							
Arc	Pressure PSI	Color	Radius ft.	Flow GPM	Flow GPH	Preci	o in/hr ▲	Color	Radius ft.	Flow GPM	Flow GPH	Precip	o in/hr ▲	Color	Radius ft.	Flow GPM	Flow GPH	Preci	p in/hr ▲
90°	25 30 35 <b>40</b> 45 50 55		– 12' 13' <b>14'</b> 14' 14' 15'	- 0.16 0.18 <b>0.19</b> 0.20 0.21 0.22	- 9.6 10.8 <b>11.4</b> 12 12.6 13.2	- 0.43 0.40 <b>0.39</b> 0.38 0.37	- 0.50 0.46 <b>0.45</b> 0.43 0.43	)° to 210°	17' 18' 19' <b>20'</b> 21' 21' 21'	0.31 0.33 0.37 <b>0.40</b> 0.42 0.44 0.47	18.6 19.8 22.2 <b>24</b> 25.2 26.4 28.2	0.41 0.39 0.39 <b>0.39</b> 0.37 0.35 0.37	0.48 0.45 0.46 <b>0.44</b> 0.42 0.40 0.43	° to 210°	25' 27' 28' <b>30'</b> 30' 30' 30'	0.69 0.74 0.80 <b>0.86</b> 0.91 0.96 1.01	41.4 44.4 48 <b>51.6</b> 54.6 57.6 60.6	0.43 0.39 0.39 <b>0.37</b> 0.39 0.41 0.43	0.49 0.45 0.45 <b>0.43</b> 0.45 0.47 0.50
180°	25 30 35 <b>40</b> 45 50 55	Maroon = $90^{\circ}$ to $210^{\circ}$	– 12' 13' <b>14'</b> 14' 15' 15'	- 0.32 0.35 <b>0.37</b> 0.40 0.41 0.43	- 19.2 21 <b>22.2</b> 24 24.6 25.8	- 0.43 0.40 <b>0.39</b> 0.38 0.37	- 0.50 0.46 <b>0.45</b> 0.45 0.43 0.43	Black = $90^{\circ}$ to $210^{\circ}$	16' 17' 18' <b>19'</b> 20' 21' 21'	0.58 0.63 0.69 <b>0.74</b> 0.78 0.83 0.85	34.8 37.8 41.4 <b>44.4</b> 46.8 49.8 51	0.44 0.42 0.41 <b>0.39</b> 0.38 0.36 0.37	0.50 0.49 0.47 <b>0.45</b> 0.43 0.41 0.43	Blue = 90° to 210°	25' 27' 28' <b>30'</b> 30' 30' 30'	1.44 1.58 1.70 <b>1.82</b> 1.93 2.04 2.13	86.4 94.8 102 <b>109.2</b> 115.8 122.4 127.8	0.44 0.42 0.42 <b>0.39</b> 0.41 0.44 0.46	0.51 0.48 0.48 <b>0.45</b> 0.48 0.50 0.53
210°	25 30 35 <b>40</b> 45 50 55	. '	- 12' 13' <b>14'</b> 14' 15' 15'	- 0.37 0.41 <b>0.43</b> 0.46 0.48 0.50	22.2 24.6 <b>25.8</b> 27.6 28.8 30	- 0.43 0.40 <b>0.39</b> 0.38 0.38 0.37	- 0.50 0.46 <b>0.45</b> 0.43 0.43		16' 17' 18' <b>19'</b> 20' 21' 21'	0.68 0.74 0.80 <b>0.86</b> 0.92 0.97 1.01	40.8 44.4 48 <b>51.6</b> 55.2 58.2 60.6	0.44 0.42 0.41 <b>0.39</b> 0.38 0.36 0.37	0.50 0.49 0.47 <b>0.45</b> 0.43 0.41 0.43		25' 27' 28' <b>30'</b> 30' 30'	1.68 1.84 1.99 <b>2.12</b> 2.25 2.37 2.49	100.8 110.4 119.4 <b>127.2</b> 135 142.2 149.4	0.44 0.42 0.42 <b>0.39</b> 0.41 0.43 0.46	0.51 0.48 0.48 <b>0.45</b> 0.48 0.50 0.53
270°	25 30 35 <b>40</b> 45 50 55							Green = 210° to 270°	16' 17' 18' <b>19'</b> 20' 21' 21'	0.87 0.95 1.03 <b>1.10</b> 1.17 1.23 1.30	52.2 57 61.8 <b>66</b> 70.2 73.8 78	0.44 0.42 0.41 <b>0.39</b> 0.38 0.36 0.37	0.50 0.49 0.47 <b>0.45</b> 0.43 0.41 0.43	Yellow = $210^{\circ}$ to $270^{\circ}$	25' 27' 28' <b>30'</b> 30' 30' 30'	2.19 2.37 2.55 <b>2.73</b> 2.89 3.06 3.22	131.4 142.2 153 <b>163.8</b> 173.4 183.6 193.2	0.45 0.42 0.42 <b>0.39</b> 0.41 0.44 0.46	0.52 0.48 0.48 <b>0.45</b> 0.48 0.50 0.53
360°	25 30 35 <b>40</b> 45 50 55	01ive = 360°	– 12' 13' <b>14'</b> 14' 15' 15'	- 0.65 0.71 <b>0.75</b> 0.80 0.84 0.87	- 39 42.6 <b>45</b> 48 50.4 52.2	- 0.43 0.40 <b>0.39</b> 0.39 0.38 0.37	- 0.50 0.47 <b>0.46</b> 0.45 0.44 0.43	Red = 360°	16' 17' 18' <b>19'</b> 20' 21' 21'	1.16 1.27 1.37 <b>1.47</b> 1.56 1.64 1.70	69.6 76.2 82.2 <b>88.2</b> 93.6 98.4 102	0.44 0.42 0.41 <b>0.39</b> 0.38 0.36 0.37	0.50 0.49 0.47 <b>0.45</b> 0.43 0.41 0.43	Gray = 360°	25' 27' 28' <b>30'</b> 30' 30' 30'	2.88 3.15 3.40 <b>3.64</b> 3.86 4.07 4.27	172.8 189 204 <b>218.4</b> 231.6 244.2 256.2	0.44 0.42 0.42 <b>0.39</b> 0.41 0.44 0.46	0.51 0.48 0.48 <b>0.45</b> 0.48 0.50 0.53

\* To obtain full radius reduction for the MP1000 and MP2000, operate at a maximum of 30 PSI.
\*\* When operating the MP3000 at full radius reduction maintain a minimum pressure of 40 PSI to assure reliable operation.
\*\*\* Lower end radius is achieved by using radius adjustment screw. Flow adjusts with radius to maintain matched precipitation.
Note: Precipitation rates are based on head-to-head throw coverage.

MP Rotator Performance Data								
		MPCorner Radius: 8' to 15' Adjustable Arc Color Code: Turquoise						
Arc	Pressure PSI	Color	Radius ft.	Flow GPM	Flow GPH			
45° ▶	25 30 35 <b>40</b> 45 50 55		- 12' 13' <b>14'</b> 14' 14' 15'	- 0.17 0.18 <b>0.19</b> 0.21 0.22 0.23	- 10.2 10.8 <b>11.4</b> 12.6 13.2 13.8			
90°	25 30 35 <b>40</b> 45 50 55	Turquoise = 45° to 105°	11' 12' 13' <b>14'</b> 14' 15' 15'	0.31 0.34 0.36 <b>0.39</b> 0.41 0.43 0.46	18.6 20.4 21.6 <b>23.4</b> 24.6 25.8 27.6			
105°	25 30 35 <b>40</b> 45 50 55		11' 12' 13' <b>14'</b> 14' 15' 15'	0.36 0.39 0.42 <b>0.45</b> 0.48 0.51 0.53	21.6 23.4 25.2 <b>27</b> 28.8 30.6 31.8			

MP Rotator Performance Data									
		MPLCS515 MPRCS515 MPSS530							
Nozzle Model	Pressure PSI	Color	Width x Length	Flow GPM	Flow GPH				
MP Left Strip	30 35 <b>40</b> 45 50 55	lvory	4' x 14' 5' x 15' <b>5' x 15'</b> 5' x 15' 6' x 16' 6' x 16'	0.19 0.21 <b>0.22</b> 0.23 0.25 0.26	11.4 12.6 <b>13.2</b> 13.8 15 15.6				
MP Right Strip	30 35 <b>40</b> 45 50 55	Copper	4' x 14' 5' x 15' <b>5' x 15'</b> 5' x 15' 6' x 16' 6' x 16'	0.19 0.21 <b>0.22</b> 0.23 0.25 0.26	11.4 12.6 <b>13.2</b> 13.8 15 15.6				
MP Side Strip	30 35 <b>40</b> 45 50 55	Brown	4' x 28' 5' x 30' <b>5' x 30'</b> 5' x 30' 6' x 32' 6' x 32'	0.38 0.41 <b>0.44</b> 0.47 0.49 0.51	22.8 24.6 <b>26.4</b> 28.2 29.4 30.6				



#### Models

MP1000 (Female Thread) & MP1000HT (Male Thread) Radius Range – 8-15' including all pressure and radius adjustment influence Pressure Range – 25-55 PSI Application Notes

- Low trajectory, perfect for smaller areas · For minimum radius, recommended install on a 30 PSI regulated Institutional Spray body
- Not available in a 210-270 model

#### MP2000 (Female Thread) & MP2000HT (Male Thread)

Radius Range - 13'-21' including all pressure and radius adjustment influence Pressure Range – 25-55 PSI

- Application Notes Flow rate is about 1/3 of a 15' spray head;
- and yet has greater radius and higher uniformity For minimum radius, recommended install on a 30 PSI regulated Institutional Spray body

#### MP3000 (Female Thread) & MP3000HT (Male Thread)

Radius Range - 22'-30' including all pressure and radius adjustment influence

Pressure Range – 25-55 PSI

Application Notes

- Flow rate is about the same as a 15' spray head; and yet has greater radius and higher uniformity
- For minimum radius, provide adjustable zone pressure regulation; Installation on a 30 PSI pressure regulated Institutional Spray body is not recommended if radius reduction is needed
- For maximum radius, provide pressures over 40 PSI

#### MPCorner (Female Thread) & MPCornerHT (Male Thread)

Radius Range - 8-15'; Pressure Range - 30-55 PSI Application Notes

- Designed for application in areas with less than 90 degrees of arc area necessary
- Does not require adjacent sprinklers to reach into the first 3-5' of coveraae

#### MPLCS515 (Female Thread) & MPLCSHT515 (Male Thread)

Flow Range - 0.14 GPM @ 30 PSI (Min. radius) 0.26 GPM @ 55 PSI (Max. radius) Pressure Range – 25-55 PSI Application Notes

- Matched precipitation even after radius reduction with head to head spacina
- Can be used on the same zone with the MP1000, MP2000 or MP3000 and still maintain matched precipitation
- Adjustable right edge

#### MPSS530 (Female Thread) & MPSSHT530 (Male Thread)

Flow Range - 0.27 GPM @ 30 PSI (Min. radius) 0.51 GPM @ 55 PSI (Max. radius) Pressure Range – 25-55 PSI Application Notes

- Matched precipitation even after radius reduction with head to head spacing
- Can be used on the same zone with the MP1000, MP2000 or MP3000 and still maintain matched precipitation
- Adjustable right edge to fit curved strips

#### MPRCS515 (Female Thread) & MPRCSHT515 (Male Thread)

Flow Range – 0.14 GPM @ 30 PSI (Min. radius) 0.26 GPM @ 55 PSI (Max. radius) Pressure Range – 25-55 PSI Application Notes

- Matched precipitation even after radius reduction with head to head spacina
- Can be used on the same zone with the MP1000, MP2000 or MP3000 and still maintain matched precipitation
- Edges are fixed

# A Closer Look at the MP Rotator

## Color Coded **Identification Ring** Model number and arc clearly visible whether the system is on or off!

Left Edge Indicator Arc is clockwise from this mark.

Inlet Screen CAUTION: Do not run the MP Rotator without the inlet screen provided!.

\* While water is on, use orange tool to engage built-in ratchet; move past the left or right stop until edge is aligned

**Radius Adjustment Screw** Turn clockwise to decrease radius, builtin slip clutch prevents damage from over adjustment.

**Arc Adjustment Ring\*** Turn clockwise to increase the radius.

The MP Rotator can be adjusted with just a screwdriver and your hand, but the MPR Tool makes adjustments even easier!





# Versatility of MP Side Strips

Yet another technological breakthrough, the MP Rotator Strip. You are now able to take all the benefits of the MP Rotator into spaces you never thought possible. The MP Rotator strip is the perfect solution for small areas of turf or plants. As the name suggests, you have

total control in watering strips and still maintain unsurpassed uniformity and performance. A new dimension in watering flexibility is available now.

SPECIFIC	SPECIFICATION GUIDE						
EXAMPLE: MP2000* - 90-210							
<b>MODEL</b> MP1000 MP2000 MP3000	ADJUSTABLE ARC 90-210 = 90° to 210° 210-270 = 210° to 270° (Not available for MP1000) 360 = 360°						
MPCORNER	<b>45-105</b> = 45° to 105°						
MPLCS515 MPRCS515 MPSS530	LEFT SIDE RIGHT						

\* Note: Add "HT" to to specify male thread.

