


Filled Connectors for Outdoor/Irrigation Use



Installation Instructions

IMPORTANT: Turn off power before installing or removing connector.
 Product to be used in accordance with local and national codes.

1. Strip wires 11/16" to 3/4".
2. Align frayed strands or conductors.
3. Do not pre-twist. Place stripped wires together with ends even, but lead smaller stranded wires slightly ahead of larger solid or stranded wire.
4. Twist connector onto wires pushing firmly until hand-tight. **DO NOT** over torque.
5. Swipe excess sealant in and around conductors. **DO NOT REUSE.**

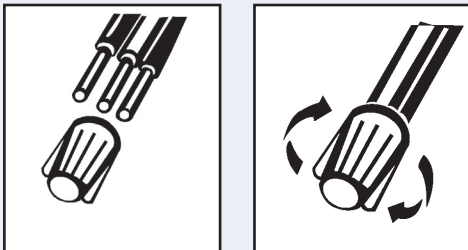

DryConn® Large Black/Blue


Catalog #	Selling Unit
61335	Bag of 10
61345	Bag of 50

PRODUCT SPECIFICATIONS & MEASUREMENTS

Max. Voltage: 600V (1,000V in fixtures and signs)
 Connector Size: 13/16" x 1 9/16"
 Wire Type: Copper/Copper
 Wire Range: Min #14/Max #6
 Temperature Rating: 105°C (221°F)
 Silicone Sealant: -45°F to 400°F
 UL Designation: KB

Measurements (Inches):

A - 1.563 B - 0.516
 C - 0.813 D - 0.656

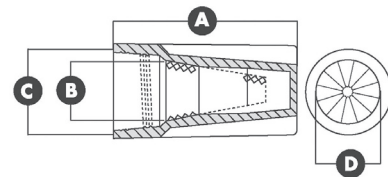

- UL 50 tested for watertight/raintight applications
- UL listed and CSA certified as a Pressure Type Connector

See reverse side for a complete listing of wire combinations.

Suitable for low voltage applications.

DryConn® Large Black/Blue

Filled Connectors For Outdoor/Irrigation Use

600V Wire Combinations

4-6 #14	1 #10 w/2 #12 & 1-3 #14	1 #8 w/2 #10 & 1-2 #12
3-6 #12	1 #10 w/3 #12 & 1-2 #14	1 #8 w/1-3 #10
2-5 #10	1 #10 w/4 # 12 & 1 #14	2 #6 w/1 #12 or 14
2-3 #8	1 #10 w/2-4 #12	1 #6 w/1-4 #12 or 14
1-2 #6	3 #8 w/1-2 #14	1 #6 w/1 #12 & 1-4 #14
4 #12 w/1 #14	2 #8 w/1-4 #14	1 #6 w/2 #12 & 1-3 #14
3 #12 w/1-3 #14	2 #8 w/1 #12 & 1-3 #14	1 #6 w/3 #12 & 1-2 #14
2 #12 w/2-4 #14	2 #8 w/2 #12 & 1 #14	1 #6 w/1 #10 & 1-4 #14
1 #12 w/4-5 #14	2 #8 w/1 #10 & 1-3 #14	1 #6 w/2 #10 & 1-2 #14
4 #10 w/1 #12 & 1 #14	2 #8 w/1-3 #12	1 #6 w/1 #10 & 1-3 #12
4 #10 w/1 #12	2 #8 w/1 #10 & 1-2 #12	1 #6 w/2 #10 & 1 #12
3 #10 w/1-3 #14	2 #8 w/1-2 #10	1 #6 w/1-3 #10
3 #10 w/1 #12 & 1-2 #14	1 #8 w/1-5 #12 or 14	1 #6 w/1 #8 & 1-4 #14
3 #10 w/2 #12 & 1 #14	1 #8 w/1 #12 & 1-4 #14	1 #6 w/1 #8 & 1-2 #12
2 #10 w/1-4 #14	1 #8 w/2 #12 & 1-3 #14	1 #6 w/1 #8 & 1 #10
2 #10 w/1 #12 & 1-3 #14	1 #8 w/3 #12 & 1-2 #14	1 #6 w/1-2 #8
2 #10 w/2 #12 & 1-2 #14	1 #8 w/4 #12 & 1 #14	
2 #10 w/3 #12 & 1 #14	1 #8 w/1 #10 & 1-4 #14	
2 #10 w/1-3 #12	1 #8 w/2 #10 & 1-3 #14	
1 #10 w/3-5 #14	1 #8 w/3 #10 & 1 #14	
1 #10 w/1 #12 & 1-4 #14	1 #8 w/1 #10 & 1-4 #12	